

SOLUTIONS LOOKING FOR TASKS



ZENITH AS



*ASCENSORE DA CANTIERE PER PERSONE E COSE
BUILDERS HOIST FOR PERSONS AND MATERIALS
ASCENSEUR DE CHANTIER POUR PERSONNES ET MATÉRIAUX*

SAFi

CORNUDA (TREVISO) - ITALY

CE

ZENITH AS

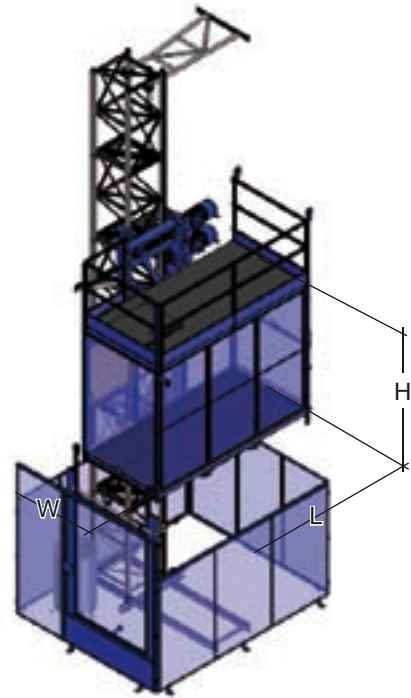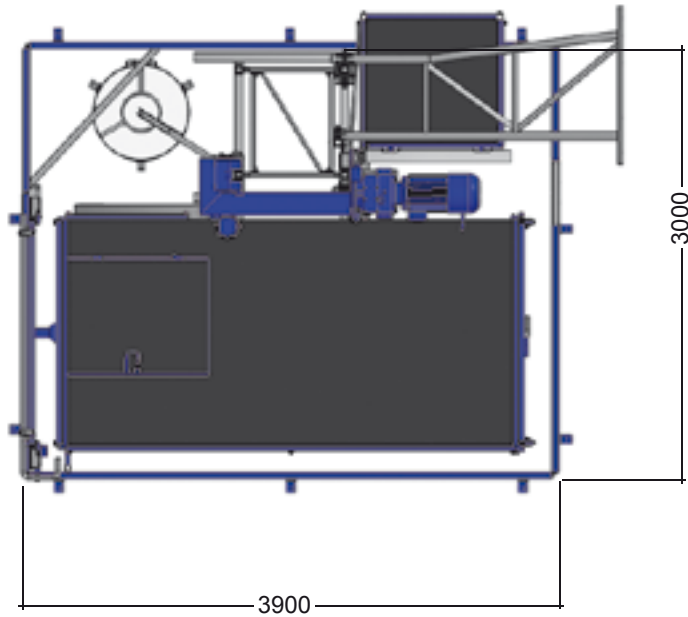

LAY-OUT GENERALE/GENERAL LAY-OUT/LAY-OUT GÉNÉRALE

DATI TECNICI	TECHNICAL DATA	DONNÉES TECHNIQUES	ZENITH AS1300	ZENITH AS1500	ZENITH AS2000	ZENITH AS2500
Traliccio quadrato/piatto	Square/flat mast	Mât carré/plat				
Opzionale: traliccio triangolare	Optional: triangular mast	Optioneel: mât triangulaire				
Portata massima	Maximum payload	Portée maximale	1300daN	1500daN	2000daN	2500daN
Numero massimo di persone	Maximum number of persons	Nombre de personnes admises	14	16	20	22
Altezza massima	Maximum height	Hauteur maximale	200.0m	200.0m	200.0m	200.0m
Distanza ancoraggi	Tie distance	Distance entre les ancrages	9.0m	9.0m	9.0m	9.0m
Dimensioni cabina (LxWxH)	Cabin dimensions (LxWxH)	Dimensions cabine (LxWxH)	3.0x1.5x2.3m	3.0x1.5x2.3m	3.0x1.5x2.3m	3.0x1.5x2.3m
Ingombro a terra	Ground dimensions	Dimensions de la base	3.9x3.0m	3.9x3.0m	3.9x3.0m	3.9x3.0m
Potenza nominale	Rated power	Puissance nominale	2x7.5Kw	2x9.2Kw	3x7.5Kw	3x11.0Kw
Alimentazione	Power supply	Alimentation	220÷240/380÷420V 50Hz	220÷240/380÷420V 50Hz	220÷240/380÷420V 50Hz	220÷240/380÷420V 50Hz
Corrente di spunto	Starting current	Courant absorbé au démarrage	195A	210A	295A	420A
Velocità di sollevamento	Travelling speed	Vitesse de levage	38.0m/min	38.0m/min	38.0m/min	45.0m/min

DATI TECNICI/TECHNICAL DATA/CARACTÉRISTIQUES TECHNIQUES



RIVENDITORE AUTORIZZATO/
AUTHORIZED DEALER/
DÉTAILLANT AUTORISÉ:



INSA INTERNATIONAL SCAFFOLDING S.R.L.
VIA S. ROCCO, 8 - 31041 - CORNUDA - TV - ITALY
TEL: +39 0423639321 - FAX +39 0423639410
WEB: WWW.SAFI.IT - E-MAIL: BOX@SAFI.IT